

## Arktis Laser Product Datasheet

### LLS-0515 Low-Noise DPSS Laser System



#### Series Specifications:

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 515 nm |
| Output Type        | CW     |
| Laser Source Type  | DPSS   |

#### Overview:

The LLS-0515 Series of Low-Noise Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring less than 1% noise and output power levels from 10 mW to 100 mW. These 515 nm lasers maintain a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for fluorescence excitation, PIV, Raman Spectroscopy, and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

#### Key Features:

- 1% optical noise (20 Hz-20 MHz)
- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

#### Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- Keys, Safety Interlock
- Hard-shell Carrying Case

## Specifications:

This spec sheet has been generated specifically for part number L51-N, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to L51-N have been highlighted below in **red + bold**.


|   |  |
|---|--|
| Output Power (mW)                               | <b>&gt;10, &gt;30, &gt;50, &gt;100</b> |
| Output Power Stability (%RMS/4h)                | <b>&lt;3, &lt;5</b>                    |
| Wavelength Tolerance (+/- nm)                   | <b>1</b>                               |
| Divergence (mrad, full angle)                   | <b>&lt;1.2</b>                         |
| Beam Dimensions (mm, 1/e <sup>2</sup> )         | <b>2</b>                               |
| Warm-up Time (minutes)                          | <b>10</b>                              |
| Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz) | <b>&lt;1</b>                           |
| M <sup>2</sup>                                  | <b>&lt;1.2</b>                         |
| Polarization Ratio                              | <b>&gt;100</b>                         |
| Operating Temperature Range (°C)                | <b>10 to 35</b>                        |
| Max. Power Input Duty Cycle                     | <b>100%</b>                            |
| Standard Warranty (months)                      | <b>12</b>                              |
| MTTF (operational hours)                        | <b>10000</b>                           |
| Weight of Product or Laser Head (kg)            | <b>2.6</b>                             |
| Beam Height from Base Plate (mm)                | <b>68.2</b>                            |
| Dimensions of Product or Laser Head (mm)        | <b>240 (l) x 99 (w) x 94 (h)</b>       |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

|  |                          |                                    |
|--|--------------------------|------------------------------------|
|  | Power Supply Type:       | <b>FN</b>                          |
| FDA-Compliant LabSpec<br> | Input Power              | <b>85v to 264v</b>                 |
|  | Power Supply Weight (kg) | <b>2.6</b>                         |
|  | Dimensions (mm)          | <b>268 (l) x 145 (w) x 106 (h)</b> |

\*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.

\*Dimensions for fiber-integrated (I\_) include laser head packaged inside.

## Regulatory Classification:

The model you have selected (L51-N) requires the following safety label(s):



**Dimensional Drawing - Laser Form Factor: N:**



DETAIL A  
SCALE 1 : 1






UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MM(INCH)  
TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

|                                  |              |
|----------------------------------|--------------|
| TITLE:<br>Laserglow Technologies |              |
| Lab/OEM<br>N/V Housing REV 1     |              |
| SCALE: 1:3                       | SHEET 1 OF 1 |

**Dimensional Drawing - Power Supply Form Factor: FN:**

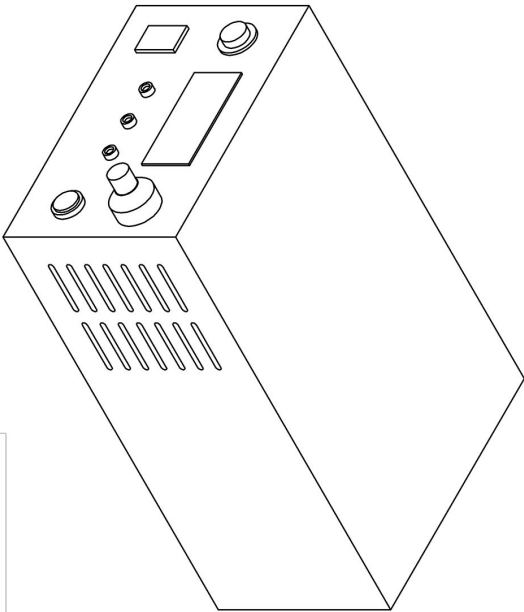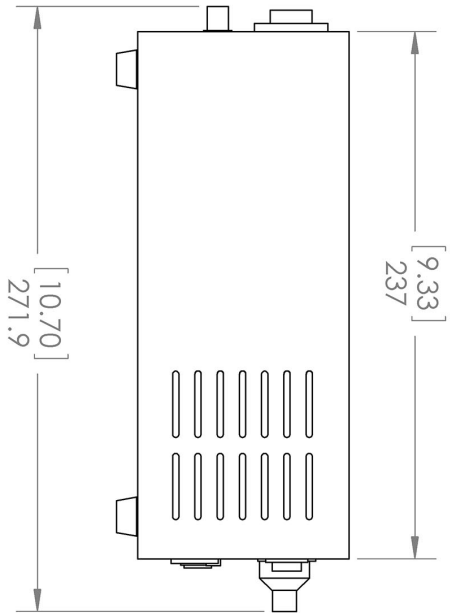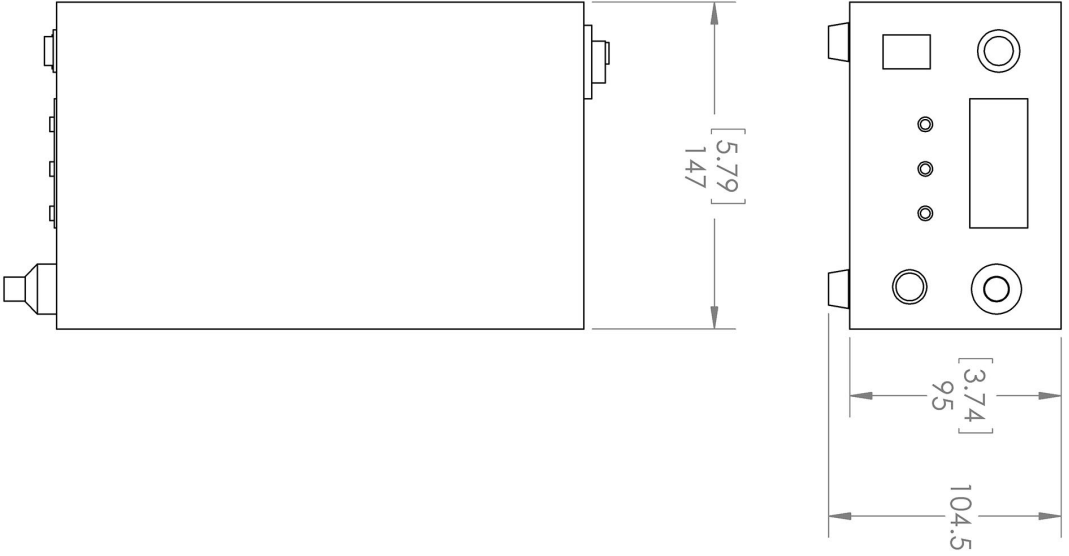

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MM(INCH)  
 TOLERANCES: +/- 0.75 MM








THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

|   |              |
|---|--------------|
| TITLE:<br><b>Power Supply</b><br><b>FH/FF/FN</b><br>REV 1 |              |
| SCALE: 1:3  | SHEET 1 OF 1 |

Laserglow Technologies

## Accessories:

The most popular accessories for model L51-N are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number   | Description  |                     |
|---|--|---------------------|
| <br>AGF5327XX   | LSG-532-NF-7 Fit-Over Safety Goggles 532nm<br>Output: OD 7+ at 190-532 nm<br>CE Certified<br>Full Details: <a href="http://www.arktislaser.com/AGF">www.arktislaser.com/AGF</a>  |                     |
| <br>ACFVISHXA   | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACF">www.arktislaser.com/ACF</a>   |                     |
| <br>ACSVISHXA   | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACS">www.arktislaser.com/ACS</a> |                     |
| <br>ACALBNWXX   | Carrying Case-104<br>Holds Lab/OEM N or W size Standard/Labspec laser<br>Full Details: <a href="http://www.arktislaser.com/ACA">www.arktislaser.com/ACA</a>  | Included With Laser |
| <br>AFF2002XX | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length<br>Full Details: <a href="http://www.arktislaser.com/AFF">www.arktislaser.com/AFF</a>   |                     |
| <br>AFS2002XX | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length<br>Full Details: <a href="http://www.arktislaser.com/AFS">www.arktislaser.com/AFS</a>  |                     |
| <br>TBK       | Complete optics kits with breadboard mounting hardware.<br>External modulators, variable attenuators, free-space fiber launch systems<br>Full Details: <a href="http://www.arktislaser.com/TBK">www.arktislaser.com/TBK</a>    |                     |

## FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser  
 112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5  
 Tel. 1-416-886-1178 Fax 1-647-874-7129  
[sales@arktislaser.com](mailto:sales@arktislaser.com) [www.arktislaser.com](http://www.arktislaser.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.