

## Arktis Laser Product Datasheet

### LQS-0355 Passively Q-Switched Laser System



#### Series Specifications:

|                    |            |
|--------------------|------------|
| Nominal Wavelength | 355 nm     |
| Output Type        | Q-Switched |
| Laser Source Type  | DPSS       |

#### Overview:

The LQS-0355 Series of Diode-Pumped Solid-State (DPSS) Q-Switched Lasers are ideal for applications requiring a short wavelength or high photon energy.

These lasers are commonly used for fluorescence excitation, Raman spectroscopy, material processing, and a broad range of other applications. The driver is available as a plug-and-play benchtop system or an O.E.M. component designed for system integration.

#### Key Features:

- Pulse energy available from 1  $\mu$ J - 10  $\mu$ J
- Pulse repetition rate of 1 kHz - 4 kHz
- Pulse duration around 7 ns
- Air cooled
- Runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- 5,000 hour maintenance-free operating life (Expected)
- FDA/CDRH compliant Class IV enclosure

#### Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

## Specifications:

This spec sheet has been generated specifically for part number Q35-F, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to Q35-F have been highlighted below in **red + bold**.

|   |                                      |
|---|--------------------------------------|
| Output Power (mW)                               | <b>&gt;4, &gt;12, &gt;20, &gt;40</b> |
| Single Pulse Energy (μJ)                        | <b>1, 3, 5, 10</b>                   |
| Optimal Pulse Frequency (Hz)                    | <b>4000</b>                          |
| Output Power Stability (%RMS/4h)                | <b>&lt;3, &lt;5, &lt;10</b>          |
| Central Wavelength (nm)                         | <b>355.1</b>                         |
| Wavelength Tolerance (+/- nm)                   | <b>1</b>                             |
| Divergence (mrad, full angle)                   | <b>&lt;1.5</b>                       |
| Beam Dimensions (mm, 1/e <sup>2</sup> )         | <b>2</b>                             |
| Warm-up Time (minutes)                          | <b>10</b>                            |
| Avg. Pulse Duration (ns)                        | <b>7</b>                             |
| Approximate Peak Power (W)                      | <b>2000</b>                          |
| Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz) | <b>&lt;20</b>                        |
| Spectral Linewidth (nm)                         | <b>&lt;0.3</b>                       |
| Polarization Ratio                              | <b>&gt;100</b>                       |
| Beam Pointing Stability (mrad)                  | <b>&lt;0.05</b>                      |
| Operating Temperature Range (°C)                | <b>10 to 35</b>                      |
| Max. TTL Modulation Freq. (Hz)                  | <b>20000</b>                         |
| Minimum Pulsing Frequency (Hz)                  | <b>1000</b>                          |
| Modulation Input Signal                         | <b>0-5 VDC</b>                       |
| Total Power Consumption (W)                     | <b>70</b>                            |
| Max. Power Input Duty Cycle                     | <b>100%</b>                          |
| Standard Warranty (months)                      | <b>12</b>                            |
| MTTF (operational hours)                        | <b>5000</b>                          |
| Weight of Product or Laser Head (kg)            | <b>1.6</b>                           |
| Beam Height from Base Plate (mm)                | <b>45</b>                            |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

**Specifications Page 2:**


|  |                             |
|--|-----------------------------|
| Laser Form Factor                        |                             |
| Dimensions of Product or Laser Head (mm) | 211.5 (l) x 88 (w) x 74 (h) |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.


|   |                          |                                    |                             |
|---|--------------------------|------------------------------------|-----------------------------|
|  | Power Supply Type:       | <b>SF</b>                          | <b>SN</b>                   |
|   | Input Power              | <b>85v to 264v</b>                 | 85v to 264v                 |
|   | Power Supply Weight (kg) | <b>2.3</b>                         | 2.3                         |
|   | Dimensions (mm)          | <b>238 (l) x 146 (w) x 102 (h)</b> | 238 (l) x 146 (w) x 102 (h) |

\*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


\*Dimensions for fiber-integrated (I\_) include laser head packaged inside.

## Regulatory Classification:

The model you have selected (Q35-F) requires the following safety label(s):

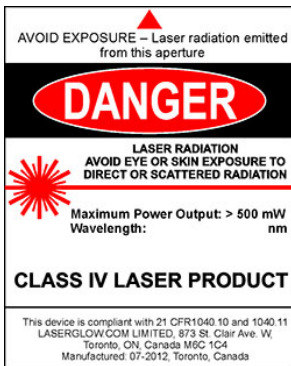

Dimensional Drawing - Laser Form Factor: F:

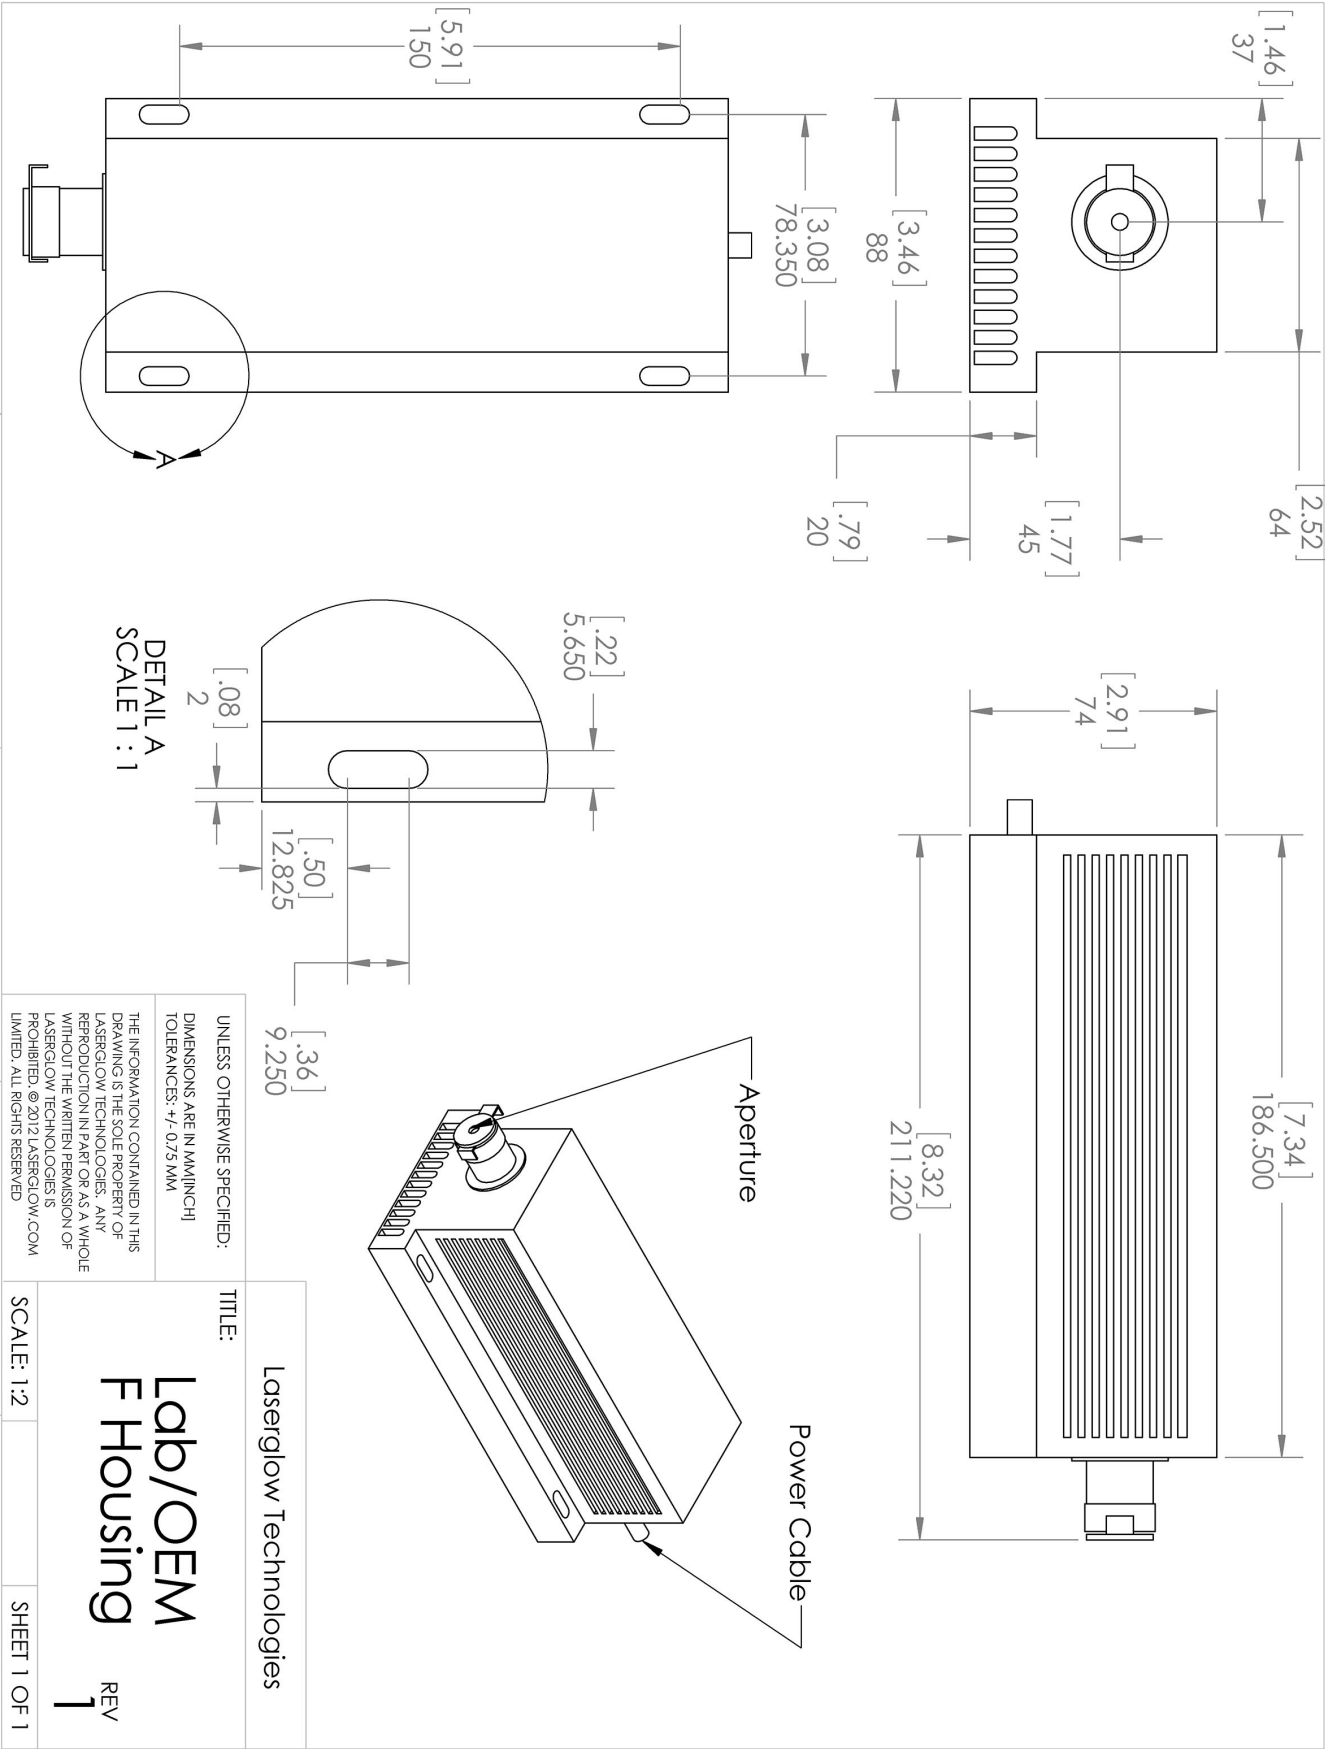







Dimensional Drawing - Power Supply Form Factor: SF:



## Accessories:

The most popular accessories for model Q35-F are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number   | Description  |                     |
|---|--|---------------------|
| <br>AGF5327XX   | LSG-532-NF-7 Fit-Over Safety Goggles 532nm<br>Output: OD 7+ at 190-532 nm<br>CE Certified<br>Full Details: <a href="http://www.arktislaser.com/AGF">www.arktislaser.com/AGF</a>              |                     |
| <br>AFS2002XX   | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length<br>Full Details: <a href="http://www.arktislaser.com/AFS">www.arktislaser.com/AFS</a>                                  |                     |
| <br>AFF2002XX   | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length<br>Full Details: <a href="http://www.arktislaser.com/AFF">www.arktislaser.com/AFF</a>                                     |                     |
| <br>ACFUV1HXX   | FC/PC Fiber Coupler/Collimator for ultraviolet wavelengths (266 to 399 nm)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACF">www.arktislaser.com/ACF</a> |                     |
| <br>ACSUV1HXX | SMA Fiber Coupler/Collimator for ultraviolet wavelengths (266 to 399 nm)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACS">www.arktislaser.com/ACS</a>   |                     |
| <br>ACALBHFX  | Carrying Case-103<br>Holds Lab/OEM H, F and O size Standard/LabSpec laser<br>Full Details: <a href="http://www.arktislaser.com/ACA">www.arktislaser.com/ACA</a>                              | Included With Laser |

## FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser

112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5

Tel. 1-416-886-1178 Fax 1-647-874-7129

[sales@arktislaser.com](mailto:sales@arktislaser.com) [www.arktislaser.com](http://www.arktislaser.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.