

# Arktis Laser Product Datasheet

## LRS-0532 DPSS Laser System



### Series Specifications:

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 532 nm |
| Output Type        | CW     |
| Laser Source Type  | DPSS   |

### Overview:

The LRS-0532 Series of Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring 5 mW to >20 W of 532 nm laser light with a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for fluorescence excitation, PIV, Raman Spectroscopy, laser display and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Available with TTL and Analog modulation, and in a wide array of output power and stability levels, Laserglow products are currently being used by some of the world's top universities and other prominent research facilities.

### Key Features:

- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- TTL and Analog modulation (input via BNC connector) *lab-spec models only*
- Specially-tuned for clean modulation responses from 1-100 Hz (*on selected models*)
- Adjustable output power (via lockable dial) *lab-spec models only*
- LED display showing LD current, laser cavity temperature *lab-spec models only*
- FDA CDRH Compliant Class IIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

### Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

## Specifications:

This spec sheet has been generated specifically for part number R53-M, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to R53-M have been highlighted below in **red + bold**.

|  |   |                           |                          |                           |                             |                           |   |
|--|---|---------------------------|--------------------------|---------------------------|-----------------------------|---------------------------|---|
| Output Power (mW)                        | <b>&lt;5, &gt;100, &gt;200, &gt;300</b> | >100, >200                | >300                     | >500, >1000, >1500        | >1500, >2000, >2500         | >3000, >4000, >5000       | >8000, >10000, >12000, >15000, >18000, >20000 |
| Output Power Stability (%RMS/4h)         | <b>&lt;1, &lt;3, &lt;5, &lt;10</b>      | <1, <3                    | <1                       | <1, <2, <3, <5            | <1, <2, <3, <5              | <1, <2, <3, <5            | <1, <3, <5                                    |
| Central Wavelength (nm)                  | <b>531.65</b>                           | 531.65                    |                          | 532                       | 531.65                      | 531.65                    | 531.65  |
| Wavelength Tolerance (+/- nm)            | <b>1</b>                                | 1                         |                          | 1                         | 1                           | 1                         | 1   |
| Divergence (mrad, full angle)            | <b>&lt;1.5</b>                          | <1.5                      | <1.5                     | <1.5                      | <1.2                        | <1.5                      | <2  |
| Beam Dimensions (mm, 1/e <sup>2</sup> )  | <b>2</b>                                | 0.8                       | 2                        | 2                         | 2                           | 1.5, 3                    | 4   |
| Warm-up Time (minutes)                   | <b>10</b>                               | 5                         |                          | 5                         | 10                          | 10                        | 10  |
| Spectral Linewidth (nm)                  | <b>&lt;0.2</b>                          |                           |                          |                           | <0.2                        |                           | <0.2  |
| M <sup>2</sup>                           | <b>&lt;1.2</b>                          | <1.2                      | <1.2                     | <1.2                      | <1.1                        | <1.3, <2, <5              | <3  |
| Polarization Ratio                       | <b>&gt;100</b>                          | >100                      |                          | >100                      | >100                        | >100                      | >50   |
| Beam Pointing Stability (mrad)           | <b>&lt;0.05</b>                         | <0.05                     |                          | <0.05                     | <0.05                       | <0.05                     | <0.05   |
| IP rating                                |   | 67                        |                          |                           |                             |                           |   |
| Lateral Shock Tolerance (G's/6ms)        |   | 7                         |                          |                           |                             |                           |   |
| Vertical Shock Tolerance (G's/6ms)       |   | 15                        |                          |                           |                             |                           |   |
| Operating Temperature Range (°C)         | <b>10 to 35</b>                         | 1 to 60                   |                          | 10 to 35                  | 10 to 35                    | 10 to 35                  | 10 to 35                                      |
| Max. Analog Modulation Freq. (Hz)        | <b>150, 30000</b>                       | 30000                     | 30000                    | 30000                     | 30000                       | 30000                     | 30000   |
| Max. TTL Modulation Freq. (Hz)           | <b>150, 10000, 30000</b>                | 30000                     | 30000                    | 30000                     | 30000                       | 30000                     | 30000   |
| Modulation Input Signal                  | <b>0-5 VDC</b>                          | 0-5 VDC                   | 0-5 VDC                  | 0-5 VDC                   | 0-5 VDC                     | 0-5 VDC                   | 0-5 VDC                                       |
| Total Power Consumption (W)              | <b>32</b>                               | 30                        |                          | 70, 125                   | 125                         | 118                       | 228, 232, 246, 250                            |
| Max. Power Input Duty Cycle              | <b>100%</b>                             | 100%                      | 100%                     | 100%                      | 100%                        | 100%                      | 100%  |
| Standard Warranty (months)               | <b>12</b>                               | 12                        | 12                       | 12                        | 12                          | 12                        | 12  |
| MTTF (operational hours)                 | <b>10000</b>                            | 10000                     | 10000                    | 10000                     | 10000                       | 10000                     | 10000   |
| Weight of Product or Laser Head (kg)     | <b>0.6</b>                              |                           | 0.2                      | 2                         | 1.6                         | 2.6                       | 6.1   |
| Beam Height from Base Plate (mm)         | <b>24.8</b>                             | 19                        | 15                       | 27.4                      | 45                          | 68.2                      | 93.5  |
| Dimensions of Product or Laser Head (mm) | <b>140.8 (l) x 73 (w) x 46.2 (h)</b>    | 100 (l) x 50 (w) x 38 (h) | 77 (l) x 30 (w) x 30 (h) | 197 (l) x 70 (w) x 50 (h) | 211.5 (l) x 88 (w) x 74 (h) | 240 (l) x 99 (w) x 94 (h) | 346 (l) x 140 (w) x 125 (h)                   |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Specifications Page 2:


|                   |  |  |  |  |  |  |  |  |  |
|-------------------|--|--|--|--|--|--|--|--|--|
| Laser Form Factor |  |  |  |  |  |  |  |  |  |
|-------------------|--|--|--|--|--|--|--|--|--|


CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.


Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

|  | Power Supply Type:       | <b>FM</b>                         | <b>FS</b>                  | <b>FO</b>                   | <b>FW</b>                   | <b>FF</b>                   |
|--|--------------------------|-----------------------------------|----------------------------|-----------------------------|-----------------------------|-----------------------------|
| FDA-Compliant LabSpec<br> | Input Power              | <b>85v to 264v</b>                | 85v to 264v                | 85v to 264v                 | 85v to 264v                 | 85v to 264v                 |
|  | Power Supply Weight (kg) | <b>1.5</b>                        | 1.5                        | 2.6                         | 5.2                         | 2.6                         |
|  | Dimensions (mm)          | <b>154 (l) x 155 (w) x 95 (h)</b> | 154 (l) x 155 (w) x 95 (h) | 268 (l) x 145 (w) x 106 (h) | 307 (l) x 168 (w) x 123 (h) | 268 (l) x 145 (w) x 106 (h) |

|   | Power Supply Type:       | <b>SM</b>                  |
|---|--------------------------|----------------------------|
| FDA-Compliant Standard<br> | Input Power              | 85v to 264v                |
|   | Power Supply Weight (kg) | 1.2                        |
|   | Dimensions (mm)          | 133 (l) x 130 (w) x 65 (h) |

|   | Power Supply Type:       | <b>1C</b>                 |
|---|--------------------------|---------------------------|
| OEM 12 Volt DC<br> | Input Power              | 0v to 12v                 |
|   | Power Supply Weight (kg) | 0.2                       |
|   | Dimensions (mm)          | 115 (l) x 59 (w) x 34 (h) |


\*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.

\*Dimensions for fiber-integrated (I\_) include laser head packaged inside.





## Regulatory Classification:

The model you have selected (R53-M) requires the following safety label(s):



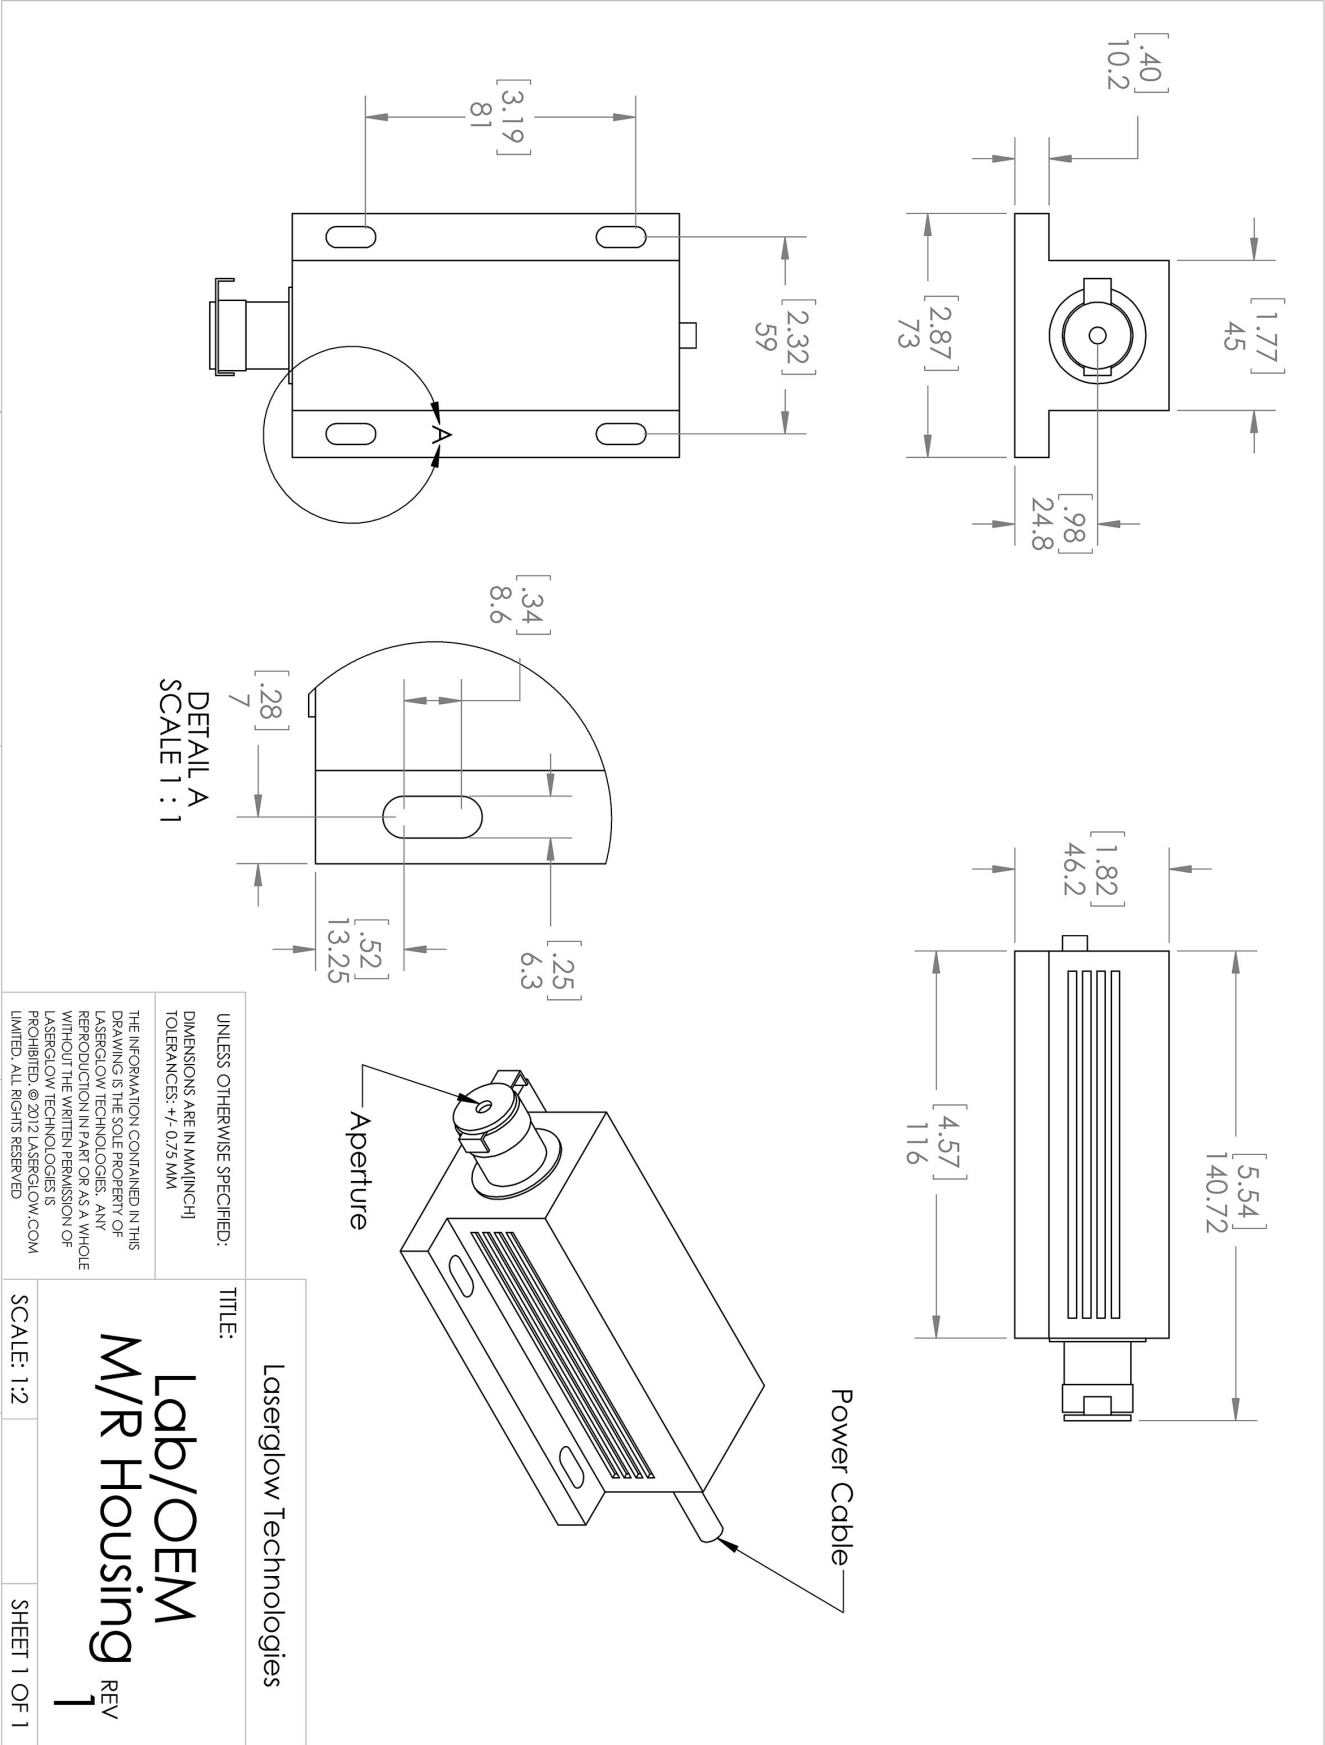

Dimensional Drawing - Power Supply Form Factor: FM:

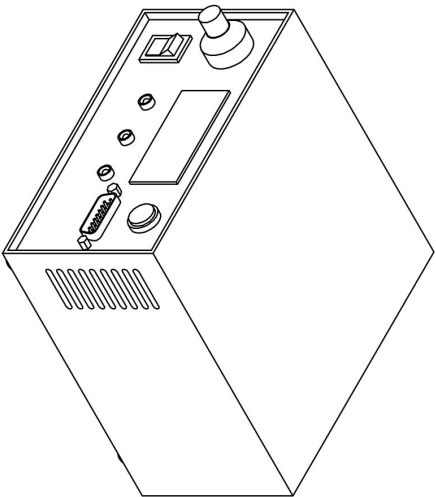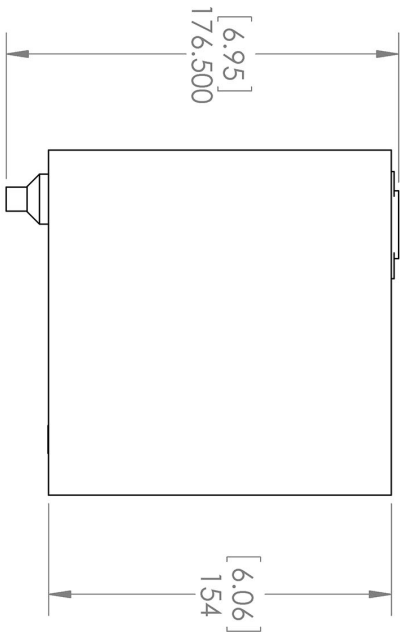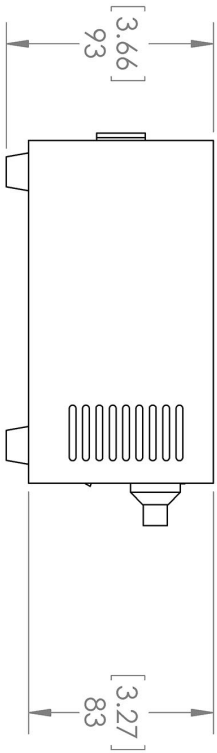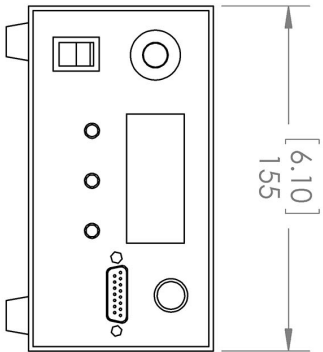

Laserglow Technologies

TITLE:

Power Supply  
FM/FR

REV  
1

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM(INCH)

TOLERANCES: +/- 0.75 MM








THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
LASERGLLOW TECHNOLOGIES. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
LASERGLLOW TECHNOLOGIES IS  
PROHIBITED. © 2012 LASERGLLOW.COM  
LIMITED. ALL RIGHTS RESERVED

SCALE: 1:3

SHEET 1 OF 1

## Accessories:

The most popular accessories for model R53-M are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number  | Description  |                     |
|--|--|---------------------|
| <br>AFF2002XX   | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length<br>Full Details: <a href="http://www.arktislaser.com/AFF">www.arktislaser.com/AFF</a>   |                     |
| <br>AFS2002XX   | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length<br>Full Details: <a href="http://www.arktislaser.com/AFS">www.arktislaser.com/AFS</a>  |                     |
| <br>AGF5327XX   | LSG-532-NF-7 Fit-Over Safety Goggles 532nm<br>Output: OD 7+ at 190-532 nm<br>CE Certified<br>Full Details: <a href="http://www.arktislaser.com/AGF">www.arktislaser.com/AGF</a>  |                     |
| <br>ACFVISHXA   | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACF">www.arktislaser.com/ACF</a>   |                     |
| <br>ACSVISHXA | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACS">www.arktislaser.com/ACS</a> |                     |
| <br>TBK       | Complete optics kits with breadboard mounting hardware.<br>External modulators, variable attenuators, free-space fiber launch systems<br>Full Details: <a href="http://www.arktislaser.com/TBK">www.arktislaser.com/TBK</a>    |                     |
| <br>ACALBMXXX | Carrying Case-102<br>Holds Lab/OEM M, R and S size, standard or LabSpec laser<br>Full Details: <a href="http://www.arktislaser.com/ACA">www.arktislaser.com/ACA</a>  | Included With Laser |

## FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser  
112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5  
Tel. 1-416-886-1178 Fax 1-647-874-7129  
[sales@arktislaser.com](mailto:sales@arktislaser.com) [www.arktislaser.com](http://www.arktislaser.com)

E&OE: Data included in this sheet may be subject to change without notice.

Please confirm critical specifications with our staff prior to ordering.