

# Arktis Laser Product Datasheet

## LRS-0660 DPSS Laser System



### Series Specifications:

|                    |        |
|--------------------|--------|
| Nominal Wavelength | 660 nm |
| Output Type        | CW     |
| Laser Source Type  | DPSS   |

### Overview:

The LRS-0660 Series of Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring 660 nm laser light at output power levels from 5 mW to >2 W. This series is available in three levels of long-term output power stability and has a long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for applications with a very narrow wavelength tolerance and a requirement for high beam quality unobtainable using a collimated diode laser. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

### Key Features:

- Air cooled - no need for water cooling or external chiller
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- TTL and Analog modulation (input via BNC connector) *lab-spec models only*
- Adjustable output power (via lockable dial) *lab-spec models only*
- LED display showing LD current, laser cavity temperature *lab-spec models only*
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

### Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

## Specifications:

This spec sheet has been generated specifically for part number R66-O, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to R66-O have been highlighted below in **red + bold**.


|  |                               |                                    |                           |                             |
|--|-------------------------------|------------------------------------|---------------------------|-----------------------------|
| Output Power (mW)                        | >50, >100                     | <b>&gt;200, &gt;300, &gt;400</b>   | >500, >800                | >1000, >1500, >2000         |
| Output Power Stability (%RMS/4h)         | <1, <3, <5                    | <b>&lt;1, &lt;3, &lt;5, &lt;10</b> | <1, <3, <5                | <1, <3, <5                  |
| Central Wavelength (nm)                  |                               | <b>659.38</b>                      |                           |                             |
| Wavelength Tolerance (+/- nm)            | 1                             | <b>1</b>                           | 1                         | 2                           |
| Divergence (mrad, full angle)            | <1.5                          | <b>&lt;1.5</b>                     | <1.5                      | <6                          |
| Beam Dimensions (mm, 1/e <sup>2</sup> )  | 1.2                           | <b>2</b>                           | 3.5                       | 4                           |
| Warm-up Time (minutes)                   | 10                            | <b>10</b>                          | 10                        | 10                          |
| Spectral Linewidth (nm)                  |                               | <b>&lt;0.03</b>                    |                           |                             |
| M <sup>2</sup>                           | <1.2                          | <b>&lt;1.2</b>                     | <3                        | <2.5                        |
| Polarization Ratio                       | >100                          | <b>&gt;100</b>                     |                           | >100                        |
| Beam Pointing Stability (mrad)           | <0.05                         | <b>&lt;0.05</b>                    | <0.05                     | <0.05                       |
| Operating Temperature Range (°C)         | 10 to 35                      | <b>10 to 35</b>                    | 10 to 35                  | 10 to 35                    |
| Max. Analog Modulation Freq. (Hz)        | 500                           | <b>500</b>                         | 500                       | 500                         |
| Max. TTL Modulation Freq. (Hz)           | 500                           | <b>500</b>                         | 500                       | 500                         |
| Modulation Input Signal                  | 0-5 VDC                       | <b>0-5 VDC</b>                     | 0-5 VDC                   | 0-5 VDC                     |
| Total Power Consumption (W)              | 30                            |                                    |                           |                             |
| Max. Power Input Duty Cycle              | 100%                          | <b>100%</b>                        | 100%                      | 100%                        |
| Standard Warranty (months)               | 12                            | <b>12</b>                          | 12                        | 12                          |
| MTTF (operational hours)                 | 10000                         | <b>10000</b>                       | 10000                     | 10000                       |
| Weight of Product or Laser Head (kg)     | 0.6                           | <b>2</b>                           | 2.6                       | 6.1                         |
| Beam Height from Base Plate (mm)         | 24.8                          | <b>27.4</b>                        | 68.2                      | 93.5                        |
| Dimensions of Product or Laser Head (mm) | 140.8 (l) x 73 (w) x 46.2 (h) | <b>197 (l) x 70 (w) x 50 (h)</b>   | 240 (l) x 99 (w) x 94 (h) | 346 (l) x 140 (w) x 125 (h) |


CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

## Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.

|  | Power Supply Type:       | <b>FM</b>                  | <b>FW</b>                   | <b>FO</b>                   | <b>FN</b>                   |
|--|--------------------------|----------------------------|-----------------------------|-----------------------------|-----------------------------|
| FDA-Compliant LabSpec<br> | Input Power              | 85v to 264v                | 85v to 264v                 | 85v to 264v                 | 85v to 264v                 |
|  | Power Supply Weight (kg) | 1.5                        | 5.2                         | 2.6                         | 2.6                         |
|  | Dimensions (mm)          | 154 (l) x 155 (w) x 95 (h) | 307 (l) x 168 (w) x 123 (h) | 268 (l) x 145 (w) x 106 (h) | 268 (l) x 145 (w) x 106 (h) |

|   | Power Supply Type:       | <b>SO</b>                          |
|---|--------------------------|------------------------------------|
| FDA-Compliant Standard<br> | Input Power              | <b>85v to 264v</b>                 |
|   | Power Supply Weight (kg) | <b>2.3</b>                         |
|   | Dimensions (mm)          | <b>238 (l) x 146 (w) x 102 (h)</b> |

\*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.


\*Dimensions for fiber-integrated (I\_) include laser head packaged inside.

## Regulatory Classification:





The model you have selected (R66-O) requires the following safety label(s):



**Dimensional Drawing - Laser Form Factor: O:**

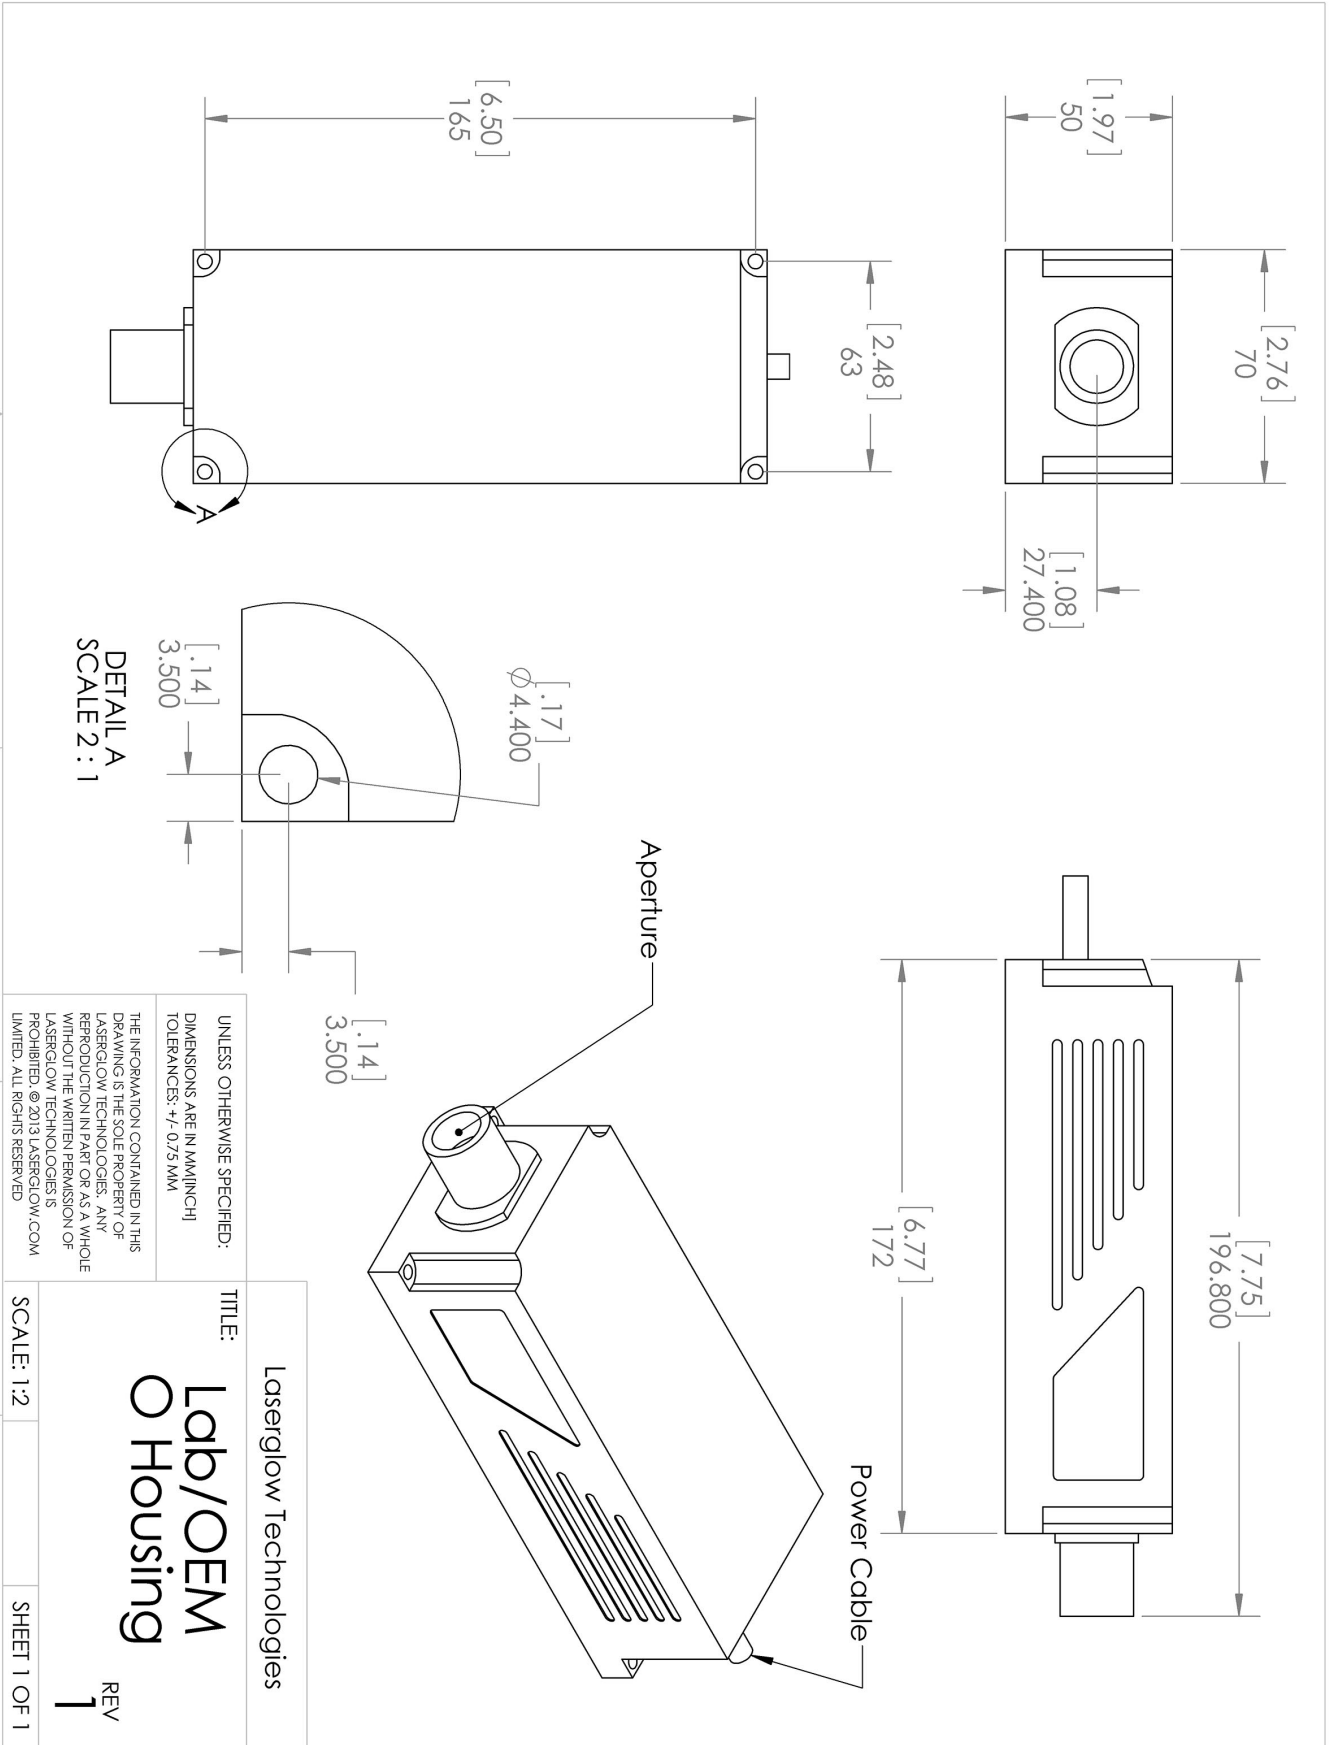

**Dimensional Drawing - Power Supply Form Factor: SO:**

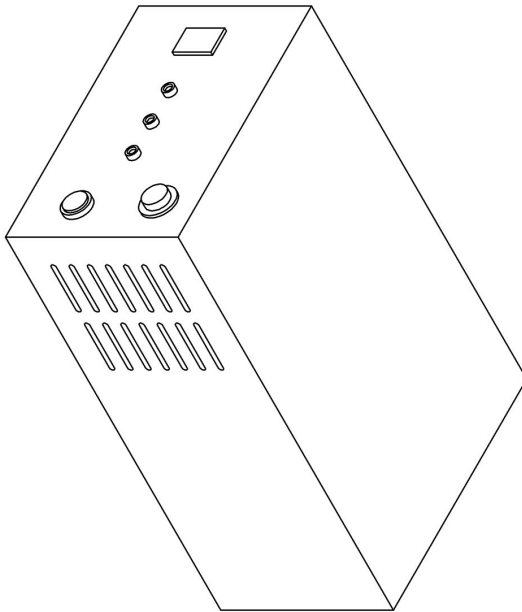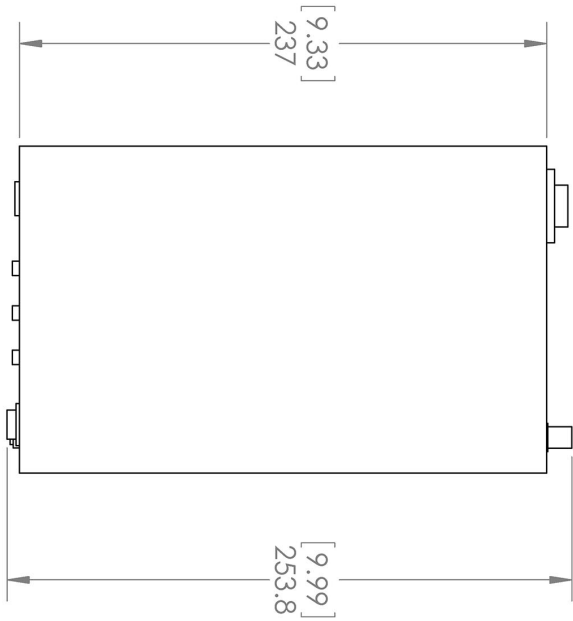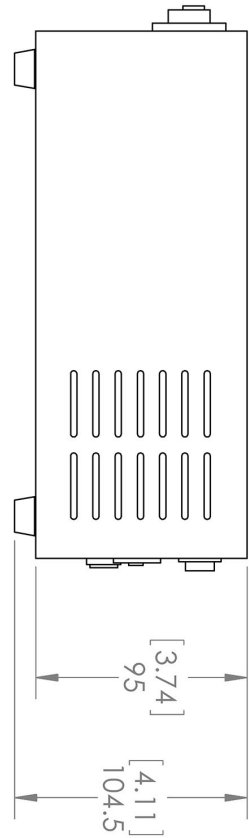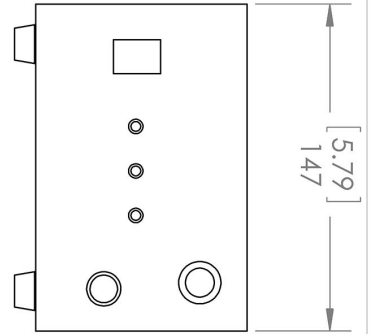








UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MM(INCH)  
 TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LASERGLOW TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LASERGLOW TECHNOLOGIES IS PROHIBITED. © 2012 LASERGLOW.COM LIMITED. ALL RIGHTS RESERVED

|   |  |
|---|--|
| TITLE:<br><b>Laserglow Technologies</b>     |  |
| SCALE: 1:3                                  |  |
| SHEET 1 OF 1                                |  |
| Power Supply<br><b>SA/SO/ST/SV</b><br>REV 1 |  |

## Accessories:

The most popular accessories for model R66-O are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number   | Description  |                     |
|---|--|---------------------|
| <br>AGF6605XX   | LSG-660-NF-5 Fit-Over Safety Goggles 660nm<br>Output: OD 5+ at 600-694 nm<br>CE Certified<br>Full Details: <a href="http://www.arktislaser.com/AGF">www.arktislaser.com/AGF</a>  |                     |
| <br>ACFVISHXA   | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACF">www.arktislaser.com/ACF</a>   |                     |
| <br>ACSVISHXA   | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm)<br>(installed and aligned)<br>11mm diameter input lens<br>Full Details: <a href="http://www.arktislaser.com/ACS">www.arktislaser.com/ACS</a> |                     |
| <br>AFS2002XX   | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length<br>Full Details: <a href="http://www.arktislaser.com/AFS">www.arktislaser.com/AFS</a>  |                     |
| <br>AFF2002XX  | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length<br>Full Details: <a href="http://www.arktislaser.com/AFF">www.arktislaser.com/AFF</a>   |                     |
| <br>TBK       | Complete optics kits with breadboard mounting hardware.<br>External modulators, variable attenuators, free-space fiber launch systems<br>Full Details: <a href="http://www.arktislaser.com/TBK">www.arktislaser.com/TBK</a>    |                     |
| <br>ACALBHFXX | Carrying Case-103<br>Holds Lab/OEM H, F and O size Standard/LabSpec laser<br>Full Details: <a href="http://www.arktislaser.com/ACA">www.arktislaser.com/ACA</a>  | Included With Laser |

## FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser  
 112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5  
 Tel. 1-416-886-1178 Fax 1-647-874-7129  
[sales@arktislaser.com](mailto:sales@arktislaser.com) [www.arktislaser.com](http://www.arktislaser.com)

E&OE: Data included in this sheet may be subject to change without notice.  
 Please confirm critical specifications with our staff prior to ordering.