

Arktis Laser Product Datasheet

LSS-0532 Single-Longitudinal-Mode DPSS Laser System



Series Specifications:

| | |
|--------------------|--------|
| Nominal Wavelength | 532 nm |
| Output Type | CW |
| Laser Source Type | DPSS |

Overview:

The LSS-532 Series of Single-Frequency, Single Longitudinal Mode Diode-Pumped Solid-State (DPSS) Lasers are ideal for applications requiring extremely long temporal coherence and an extremely narrow spectral linewidth. This series of 532 nm SLM lasers are available from 5 mW to >5 W and maintain a high level of long-term output power stability and long operating lifetime at an aggressively competitive cost.

These lasers are commonly used for various scientific purposes such as Raman Spectroscopy, holography / interferometry, biological experiments, communications research, and a broad spectrum of other applications. The driver is available as a complete FDA-compliant system or as an O.E.M. component with significantly reduced dimensions.

Laserglow products are currently being used by some of the World's top universities and other prominent research facilities.

Key Features:

- Air cooled - no need for water cooling or external chiller
- Spectral linewidth 0.000001 nm (Up to 800 mW)
- Lightweight, compact design
- Efficient DPSS technology runs on standard AC power (85 - 264 V, 47 - 63 Hz)
- >10,000 hours continuous maintenance-free operating life
- FDA CDRH Compliant Class IIIb / Class IV enclosure
- 48-hour replacement coverage available for an additional fee on specific models

Package Includes:

- Laser Head
- Driver/Power Supply
- Power Cable
- BNC Connector (LabSpec models only)
- Keys, Safety Interlock
- Hard-shell Carrying Case

Specifications:

This spec sheet has been generated specifically for part number S53-OH, per your request, and data for the entire series is also displayed for your reference. The specs which are specific to S53-OH have been highlighted below in **red + bold**.


| | | | | | |
|---|--|----------------------------------|-----------------------------|-----------------------------|---|
| Output Power (mW) | <5, >30, >50, >100, >200, >300, >400 | >30, >50, >100, >200, >300, >400 | >100 | >500, >1000 | >2000, >3000, >4000, >5000, >8000, >10000 |
| Output Power Stability (%RMS/4h) | <1, <2, <3 | <0.5, <1, <3, <5 | <3 | <1, <3, <5 | <1, <3, <5 |
| Central Wavelength (nm) | 532 | 531.65 | | 531.65 | 531.65 |
| Wavelength Tolerance (+/- nm) | 1 | 1 | | 1 | 1 |
| Divergence (mrad, full angle) | | <1.2 | <1.2 | <1.2 | <1.5 |
| Beam Dimensions (mm, 1/e ²) | | 1.5 | 1.5 | 2.5 | 1.5 |
| Warm-up Time (minutes) | 15 | 10 | | 10 | 10 |
| Optical Noise Amplitude (%RMS @ 20 Hz - 20 MHz) | | <0.5 | | <1 | <1 |
| Spectral Linewidth (nm) | <1.0E-5 | <1.0E-5 | | <1.0E-5 | <1.0E-5 |
| Frequency Shift (Hz/8hrs) | 200 | | | | |
| M ² | <1.2 | <1.2 | <1.2 | <1.5 | <1.2 |
| Polarization Ratio | | >100 | | >100 | >100 |
| Coherence Length (m) | >50 | >50 | | >50 | >50 |
| Beam Pointing Stability (mrad) | | <0.05 | | <0.05 | <0.05 |
| Operating Temperature Range (°C) | | 15 to 35 | | 15 to 35 | 20 to 30 |
| Total Power Consumption (W) | | 22, 32 | 32 | | |
| Max. Power Input Duty Cycle | 100% | 100% | 100% | 100% | 100% |
| Standard Warranty (months) | 12 | 12 | 12 | 12 | 12 |
| MTTF (operational hours) | | 10000 | 10000 | 10000 | 10000 |
| Weight of Product or Laser Head (kg) | 3.6 | 2 | 1 | 1.6 | |
| Beam Height from Base Plate (mm) | 84.7 | 27.4 | 27.4 | 45 | 58 |
| Dimensions of Product or Laser Head (mm) | 197 (l) x 117.5 (w) x 107.3 (h) | 197 (l) x 70 (w) x 50 (h) | 142.5 (l) x 60 (w) x 50 (h) | 211.5 (l) x 88 (w) x 74 (h) | 427 (l) x 190 (w) x 83 (h) |

CW: All specifications are based on performance at full output power and after the specified warmup period. Output characteristics may change if the laser is run at a different power level.

Q-Switched: Specifications are based on the laser pulsing at the specified design frequency. Output characteristics may change if the laser is run at a different frequency.

Power Supply Options:

These lasers are available with several different power supply options. The model that you have selected is highlighted below, and any other options are shown for easy reference.


| | Power Supply Type: | SO | SF | SW |
|---|--------------------------|------------------------------------|-----------------------------|-----------------------------|
|  FDA-Compliant Standard | Input Power | 85v to 264v | 85v to 264v | 85v to 264v |
| | Power Supply Weight (kg) | 2.3 | 2.3 | 5.1 |
| | Dimensions (mm) | 238 (l) x 146 (w) x 102 (h) | 238 (l) x 146 (w) x 102 (h) | 307 (l) x 168 (w) x 123 (h) |

*Power supply may not be exactly as shown, see dimensional drawings on next 2 pages.





*Dimensions for fiber-integrated (I_) include laser head packaged inside.

Regulatory Classification:

The model you have selected (S53-OH) requires the following safety label(s):

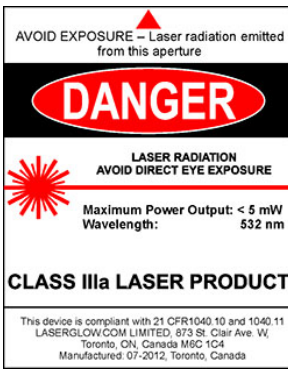

Dimensional Drawing - Power Supply Form Factor: SO:

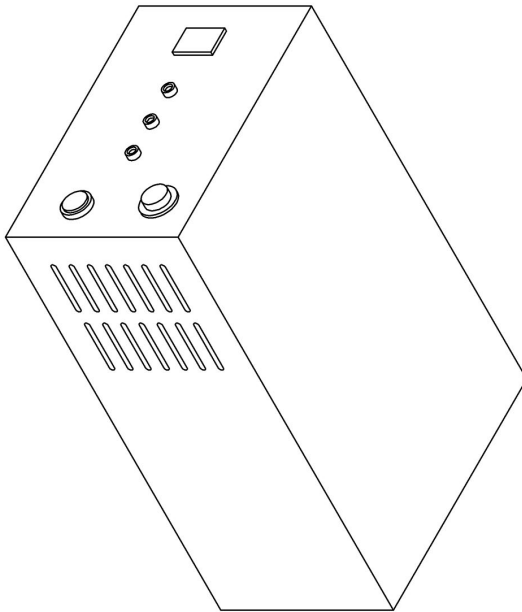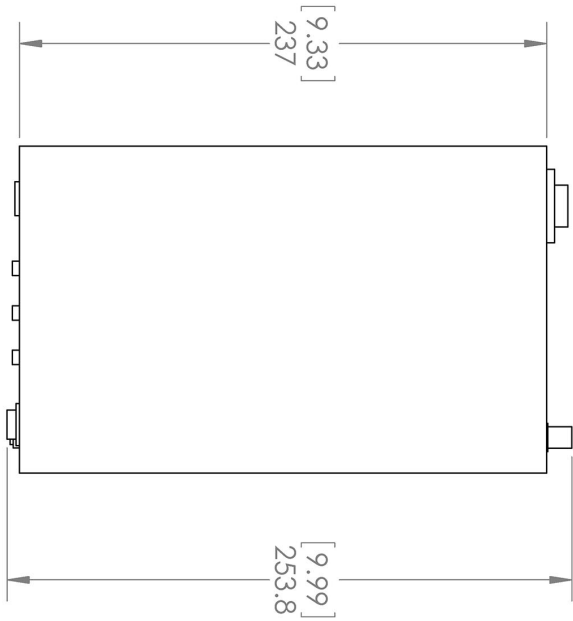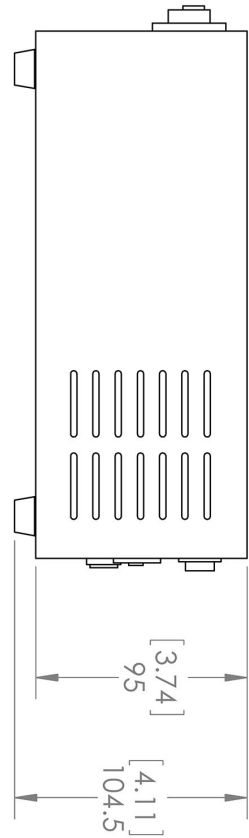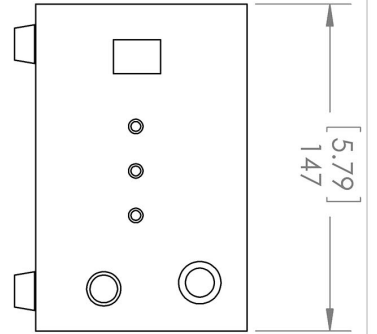








UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MM(INCH)
 TOLERANCES: +/- 0.75 MM

THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 LASERGLLOW TECHNOLOGIES. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 LASERGLLOW TECHNOLOGIES IS
 PROHIBITED. © 2012 LASERGLLOW.COM
 LIMITED. ALL RIGHTS RESERVED

| | |
|--|--|
| TITLE: Laserglow Technologies | |
| SCALE: 1:3 | |
| SHEET 1 OF 1 | |
| Power Supply SA/SO/ST/SV REV 1 | |

Accessories:

The most popular accessories for model S53-OH are shown below. For additional details regarding these or other accessories please see our website or contact us directly.

| Part Number | Description | |
|--|--|---------------------|
|  AFF2002XX | Armored Fiber With FC/PC Connectors 200um Core Multimode 2m length Full Details: www.arktislaser.com/AFF | |
|  AFS2002XX | Armored Fiber With SMA 905 Connectors 200um Core Multimode 2 m length Full Details: www.arktislaser.com/AFS | |
|  AGF5327XX | LSG-532-NF-7 Fit-Over Safety Goggles 532nm Output: OD 7+ at 190-532 nm CE Certified Full Details: www.arktislaser.com/AGF | |
|  ACFVISHXA | FC/PC Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.arktislaser.com/ACF | |
|  ACSVISHXA | SMA-905 Fiber Coupler/Collimator for visible spectrum wavelengths (400 to 700 nm) (installed and aligned) 11mm diameter input lens Full Details: www.arktislaser.com/ACS | |
|  TBK | Complete optics kits with breadboard mounting hardware. External modulators, variable attenuators, free-space fiber launch systems Full Details: www.arktislaser.com/TBK | |
|  ACALBHFXX | Carrying Case-103 Holds Lab/OEM H, F and O size Standard/LabSpec laser Full Details: www.arktislaser.com/ACA | Included With Laser |

FOR MORE INFORMATION PLEASE CONTACT:

Arktis Laser
112 Elizabeth St, Unit 5-331, Toronto, ON, Canada M5G 1P5
Tel. 1-416-886-1178 Fax 1-647-874-7129
sales@arktislaser.com www.arktislaser.com

E&OE: Data included in this sheet may be subject to change without notice.
Please confirm critical specifications with our staff prior to ordering.